


GENERAL PURPOSE FREQUENCY-SHIFT TRANSMITTER, 1000 WATTS


GPT-750C2

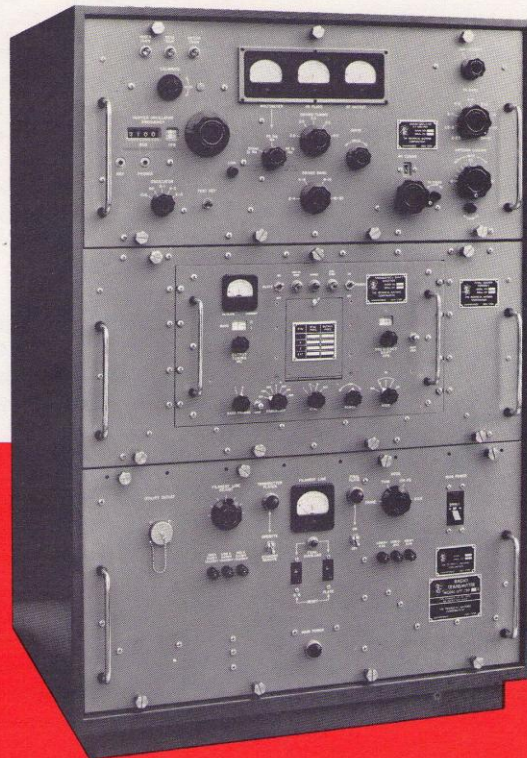

Designed for the teletype or facsimile transmitting station, the Model GPT-750C2 Transmitter operates at 1000 watts average power in the CW (A1), FSK (F1), and FAX (F4) modes. Frequency stable to one part in 10^6 per day operating in any environment between 0 and $+50^{\circ}\text{C}$, up to 95% relative humidity, the transmitter is capable of continuous coverage in the 2 to 30 MHz range. Shifts from linear to 1000 Hz at keying speeds of 750 baud (1000 WPM) are standard features as is complete front panel control of all operations.

The main drive is a TMC Model XFK-2 exciter located in the center deck. Three crystal positions are provided for internal oscillators. A fourth position transfers the RF source input to an external master oscillator built in to the top deck. The lower deck contains overload and main power breakers in addition to all power supply components. Interlocks kick the main power off when the decks are pulled open on individual track slides. The operator is then protected from high voltage while working on the transmitter. Both shocks and a 3-inch raised base are available as mounts for the 39-inch rack. Complete installation can be accomplished within a few minutes.

Revised 1 August 1971



THE TECHNICAL MATERIEL CORPORATION

AND SUBSIDIARIES

TECHNICAL SPECIFICATIONS

FREQUENCY INFORMATION

- Range**
2 to 30 MHz
- Stability**
+/- 10 Hz for a 15^o change in ambient, 0 to +50^oC range.
- Control**
Three temperature-controlled crystals
External VFO input

OPERATING PARAMETERS

- Modes**
CW(A1) FSK(F1) FAX(F4)
- Power Output**
1000 Watts Average
- Output Impedance**
50 ohms nominal, unbalanced
- Tuning**
All tuning and bandswitching from the front panel
- Metering**
All critical circuits and output readings are metered on the front panel
- Master Oscillator By-Pass**
Bypass switch permits continued operation of master oscillator oven elements while balance of transmitter is in power OFF condition.
- Safety Features**
Overload relays protect against abnormal operating levels of the final and safety interlocks protect personnel.
- Mounting**
Shock mounts for various applications are available on request.

KEYING INFORMATION

- Shift** Linear to 1000 Hz
- Sources** Polar or neutral positive
Linear input, 30K-ohms
- Speed** 750 baud 1000 WPM)
- Impedance** Polar or neutral operation into 100K ohms may be bridged by an external 1800-ohm loop resistance.
- Bias** Not greater than 10% at 750 baud.

ENVIRONMENTAL AND INSTALLATION

- Operating Conditions**
0 to +50^oC, up to 95% relative humidity
- Heat Dissipation**
Approximately 2000 watts
- Cooling**
High capacity, filtered forced air
- Primary Power**
115/230 VAC, 50/60 Hz, single phase
- Size and Weight**
56" high X 39" wide X 31" deep
Approximately 1405 lbs.
- Loose Items**
Mating RF connectors
All interconnect cables
Base-mounted equipment rack.
Two copies of Instruction Manual

OPTIONAL ACCESSORIES

- Model ATS-2A Antenna Tuning System
Manual tuning into a 35-foot vertical
Technical Bulletin 2053-1



THE TECHNICAL MATERIEL CORPORATION

700 FENIMORE ROAD • MAMARONECK, NEW YORK 10543

SPRINGFIELD, VIRGINIA • OTTAWA, CANADA • LUZERN, SWITZERLAND • TEMPE, ARIZONA

(914) 698-4800 • (613) 822-0244 • twx 710-566-1100 • telex 013-446

www.radiopharos.it